




# Fibre Cement

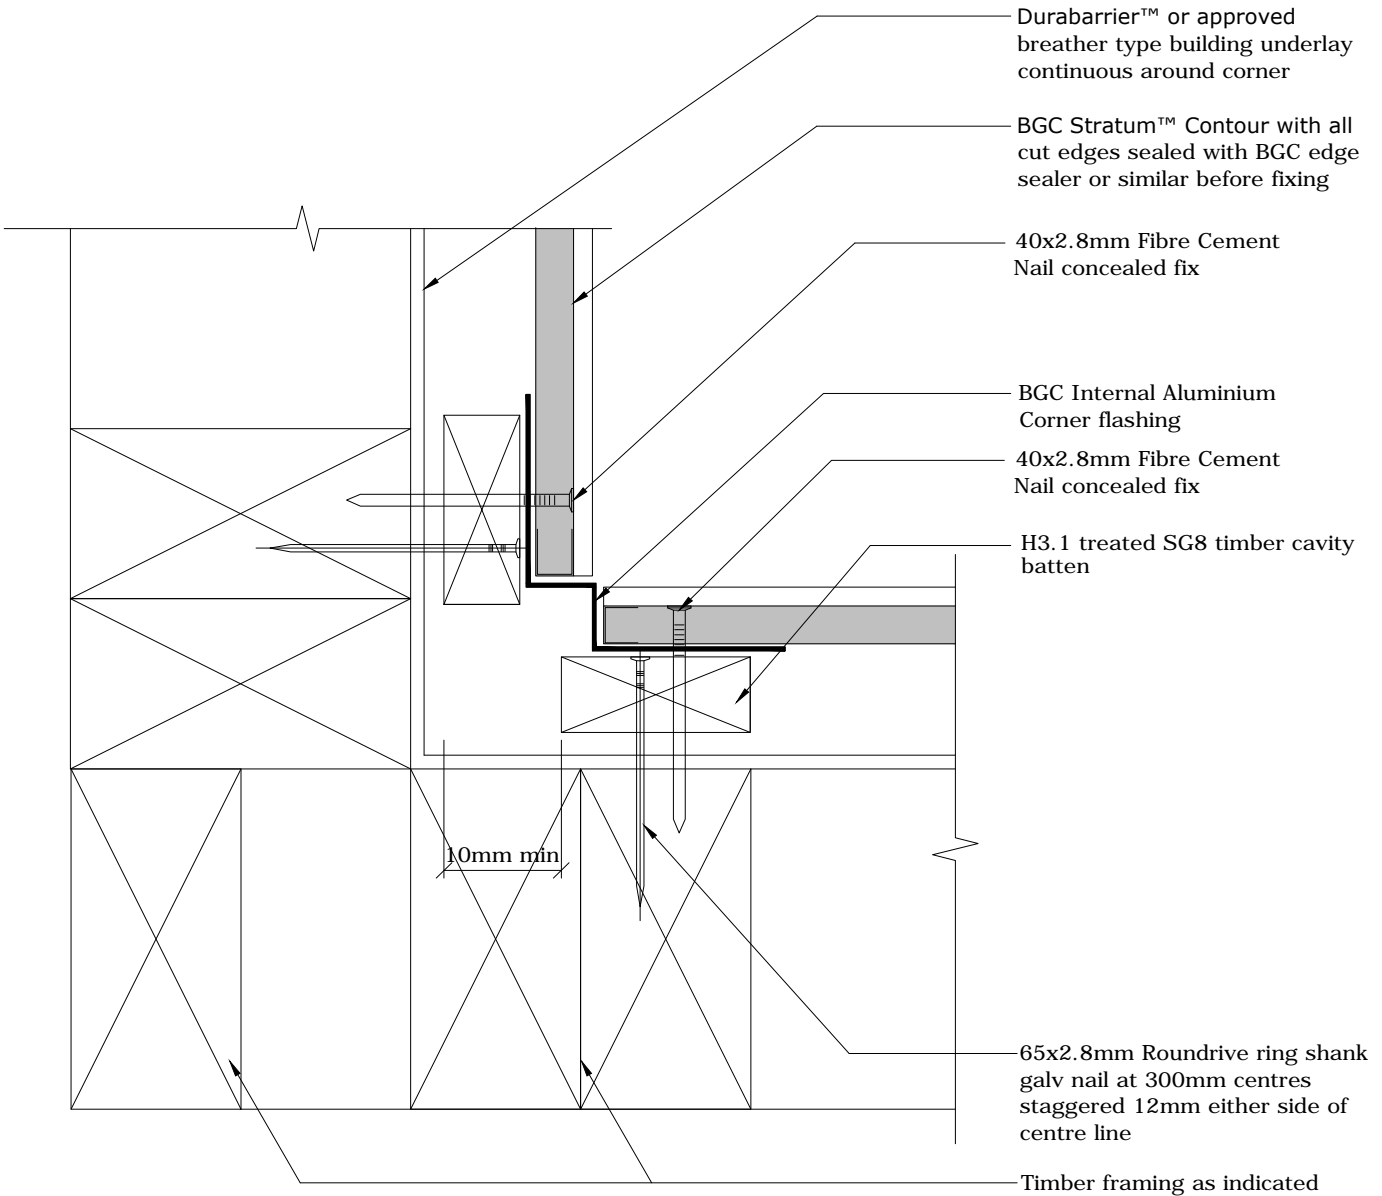

DurabARRIER™ or approved breather type building underlay continuous around corner

BGC Stratum™ Contour with all cut edges sealed with BGC edge sealer or similar before fixing

40x2.8mm Fibre Cement Nail concealed fix

BGC Internal Aluminium Corner flashing

40x2.8mm Fibre Cement Nail concealed fix

H3.1 treated SG8 timber cavity batten

10mm min

65x2.8mm Roundrive ring shank galv nail at 300mm centres staggered 12mm either side of centre line

Timber framing as indicated

**Cavity Batten Note:**  
 Refer to cavity batten layout for batten sizes, types, spacing's & fixings.

PROFILE BGC Stratum™ Contour

DATE Feb 2014

DETAIL Internal Corner Aluminium Trim Cavity Construction

SCALE 1:2 @ A4

DETAIL NO. STC-10